





1. Server blocks in *accept*, waiting for connection request on listening descriptor *listenfd*.

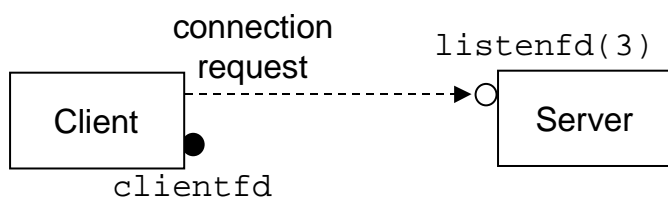

2. Client makes connection request by calling and blocking in *connect*.

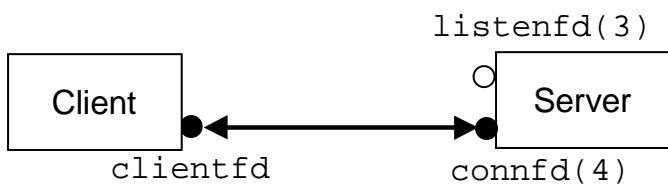

3. Server returns *connfd* from *accept*. Client returns from *connect*. Connection is now established between *clientfd* and *connfd*.