


Data Structures for open files

The kernel maintains three distinct structures for open files:

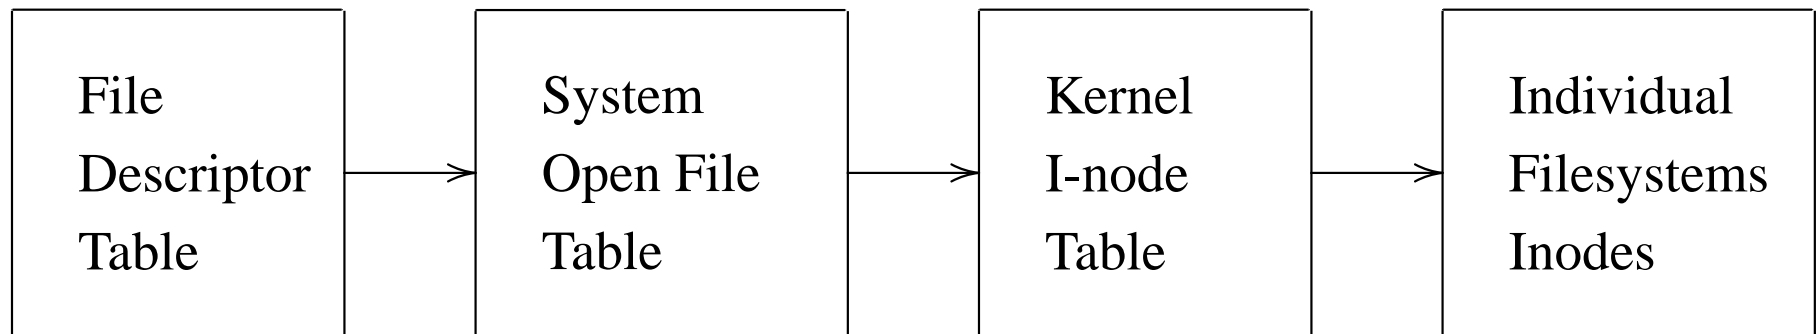

Each table entry contains a pointer to an entry in the next table.